

CM20MD-12/24V

DIE SET TABLE CM20MD-12/24V




Die #	Crimp.range	D	L
10*	10.0-12.0	10*	60
12*	12.0-14.0	12*	60
14	14.0-16.0	14	60
16	16.0-19.0	16	60
19	19.0-22.0	19	60
22	22.0-26.0	22	75
26	26.0-30.0	26	75
30	30.0-34.0	30	75
34	34.0-39.0	34	80
39	39.0-45.0	39	80
45	45.0-51.0	45	90
51*	51.0-57.0	51	90
57*	57.0-63.0	57	100
63*	63.0-69.0	63	100
69*	69.0-74.0	69	100
74*	74.0-78.0	74*	110
78*	78.0-84.0	78*	110

* Optional Dies

Benefit:

Digital Precision Control
 Compact & Robust Design
 Standard Quick Change Tool & Die Rack
 TUV CE Approved

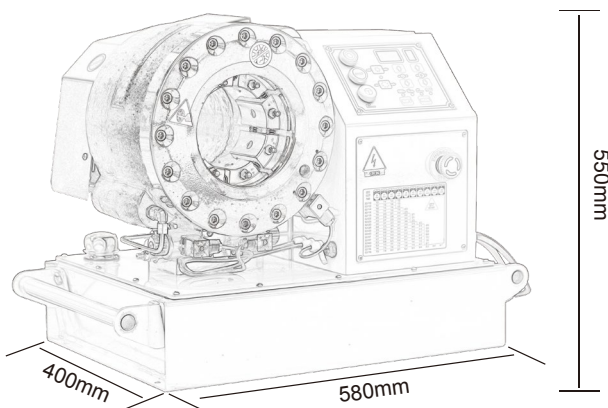

Main Specification	CM20MD-12V
Max Hydraulic Hose	1 1/4"SP
Crimping Range mm	4-65
Die Type	P32
Master Die Length mm	80
Max Opening mm	+26
Motor KW	3KW 12/24V
Crimping Force KN	DC 2200
Control	Digital Control
Foot pedal	Optional
Die Rack	Optional
Quick Change Tool	Optional
Backstop Device	Optional
Control by Pressure	Optional
Noise Level dBA	65
Protection Class	IP56
L*W*H mm	580*400*550
Weight KG	220