

# CM20S-3PH

## DIE SET TABLE CM20S-3PH




Die #	Crimp.range	D	L
10*	10.0-12.0	10*	60
12*	12.0-14.0	12*	60
14	14.0-16.0	14	60
16	16.0-19.0	16	60
19	19.0-22.0	19	60
22	22.0-26.0	22	75
26	26.0-30.0	26	75
30	30.0-34.0	30	75
34	34.0-39.0	34	80
39	39.0-45.0	39	80
45	45.0-51.0	45	90
51*	51.0-57.0	51	90
57*	57.0-63.0	57	100
63*	63.0-69.0	63	100
69*	69.0-74.0	69	100
74*	74.0-78.0	74*	110
78*	78.0-84.0	78*	110

Dies with \* Optional

### Benefit:

Full Automatic Control with foot pedal  
 Quick Change Tool and Die rack  
 Energy Saving and Safety Operation  
 TUV CE Approved

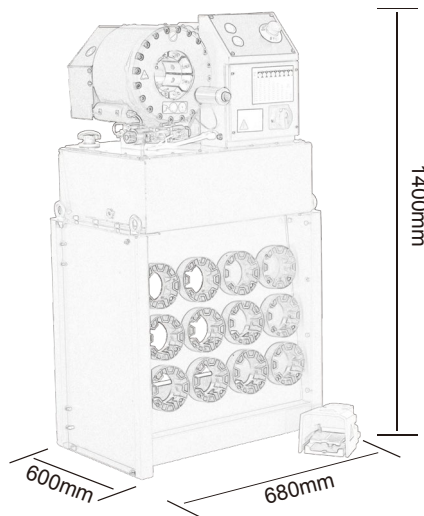

Main Specification	CM20S-3PH
Max Hydraulic Hose	1 1/2" 4SP
Crimping Range mm	4-65
Die Type	P20
Master Die Length mm	80
Max Opening mm	+26
Motor KW	4KW by SIEMENS
Crimping Force KN	1700
Control	Control with advanced programmable chip
Foot pedal	Included
Die Rack	Included
Quick Change Tool	Included
Backstop Device	Optional
Control by Pressure	Optional
Noise Level dBA	65
Protection Class	IP56
L*W*H mm	680*600*1400
Weight KG	270